

INTRUDER®

UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience ultimate protection and comfort with Intruder® safety glasses. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment.




ANTI-FOG
OPTIONS



H2MAX
OPTIONS



CUSTOM
LOGO

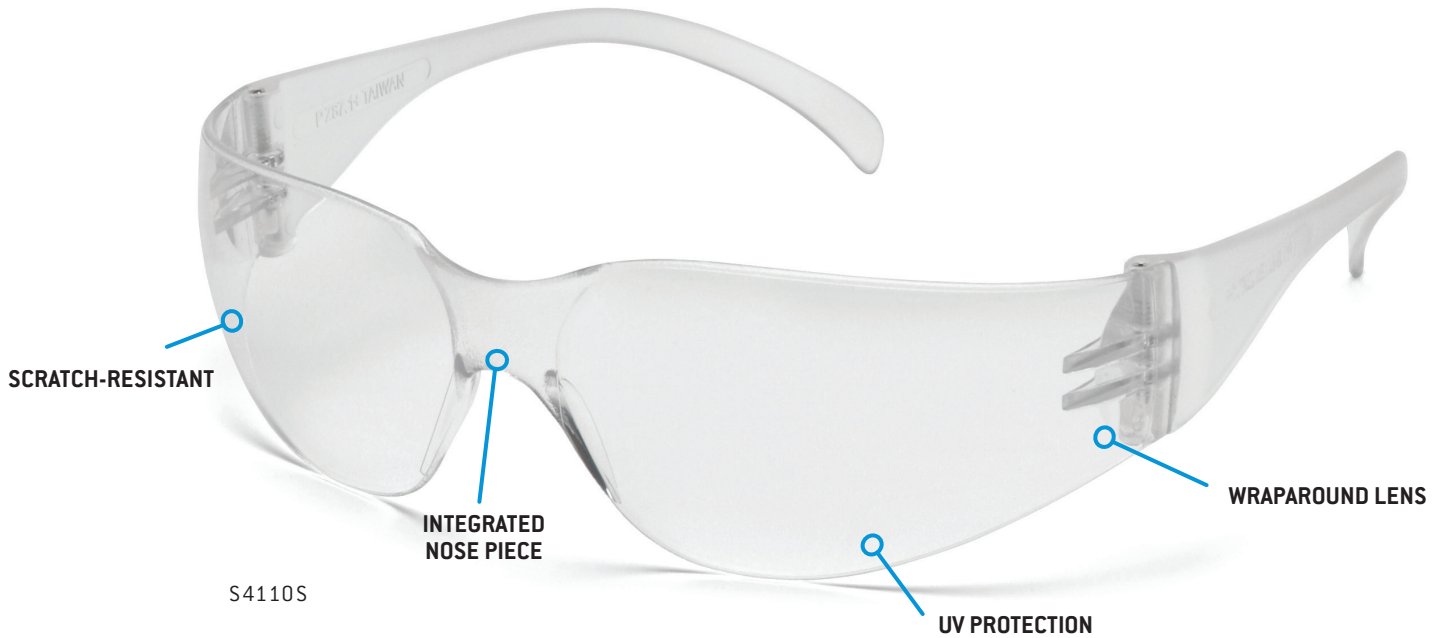

FEATURES

Unparalleled Comfort: Experience the ultimate in comfort with these frameless, lightweight safety glasses, ideal for long hours on the job

Enhanced Field of Vision: Panoramic polycarbonate, wraparound lens offers an extended field of vision crucial for safety in busy work environments, while also providing UV protection for comprehensive eye safety

Confident Fit: Integrated nose piece securely positions the glasses, ensuring they stay in place, providing reliable eye protection

Anti-Fog Clarity: (Select styles) Treated with anti-fog properties to guarantee fog-free clarity, even in extreme conditions

Built Tough: Meets ANSI/ISEA Z87.1-2020, for eye and face protection devices



SB4110S



SN4110S



SR4110S

INTRUDER®

UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience ultimate protection and comfort with Intruder® safety glasses. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment.



ANTI-FOG
OPTIONS



H2MAX
OPTIONS



CUSTOM
LOGO

VARIATIONS

Lens and Temples | 12 Variations

● S4110S	Clear
● S4110ST	Clear AF
● S4110STM	Clear H2MAX AF
● S4120S	Gray
● S4120ST	Gray AF
● S4120STM	Gray H2MAX AF
● S4130S	Amber
● S4160S	Infinity Blue
● S4170S	Silver Mirror
● S4175S	Blue Mirror
● S4180S	I/O Mirror
● S4180ST	I/O Mirror AF

Black Temples | 1 Variation

● SB4110S	Clear
-----------	-------

Blue Temples | 1 Variation

● SN4110S	Clear
-----------	-------

Red Temples | 1 Variation

● SR4110S	Clear
-----------	-------

Lens and Temples | Hang Tag Polybag

● PYS4110S4PK	4 Pack of Clear Lens with Clear Temples
---------------	---

Lens and Temples | Dispenser Box

● S4110SD	12 Pack of Clear Lens with Clear Temples
● S4120SD	12 Pack of Gray Lens with Gray Temples
● S4180SD	12 Pack of I/O Mirror Lens with I/O Temples



S4110SD

MATERIALS

Lens	Temples	Hinge	Screw
Polycarbonate	Polycarbonate	Polycarbonate	Stainless Steel

MARKINGS

Part No.	Lens Marking	Frame Marking	Lens Marking Symbols	Temple Marking Symbols	Measurements
S4110S	P Z87 + U6	P Z87 + / P c SEI Z94.3	P: Manufacturer's mark	P: Manufacturer's mark	Weight: 23.1 gm
S4110ST	P Z87 + U6	P Z87 + / P c SEI Z94.3	Z87: ANSI/ISEA Z87.1-2020 standard for eye and face protection devices	Z87: ANSI/ISEA Z87.1-2020 standard for eye and face protection devices	PD: 64 mm
S4110STM	P Z87 + U6 X	P Z87 + / P c SEI Z94.3	+: High impact	+: High impact	Bridge: 17.27 mm
S4120S	P Z87 + U6 L3	P Z87 + / P c SEI Z94.3	S: Special Purpose	SEI Z94.3: Certified for CAN/CSA Z94.3-20 standard for eye and face protection devices	Lens base: 10 curve
S4120ST	P Z87 + U6 L3	P Z87 + / P c SEI Z94.3	X: Tested Anti-fog		Lens size diagonal: 77.08 mm
S4120STM	P Z87 + U6 L3 X	P Z87 + / P c SEI Z94.3	UV Filter Transmittance		Lens size vertical: 43.38 mm
S4130S	P Z87 + S	P Z87 + / P c SEI Z94.3	U6: .01% max effective far UV • .1% max near UV		Lens thickness: 2.5 mm
S4160S	P Z87 + S	P Z87 + / P c SEI Z94.3	Visible Light Filters		Overall length (lens - tip): 156 mm
S4170S	P Z87 + S	P Z87 + / P c SEI Z94.3	L1.7: 55% Max. Visible Light		Overall width (hinge - hinge): 135.5 mm
S4175S	P Z87 + S	P Z87 +	L3: 18% max visible light		Closest point between temples: 91.53 mm
S4180S	P Z87 + U6 L1.7	P Z87 + / P c SEI Z94.3			Closest point between lens: 16.67 mm
S4180ST	P Z87 + U6 L1.7	P Z87 +			
SB4110S	P Z87 + U6	P Z87 + / P c SEI Z94.3			
SN4110S	P Z87 + U6	P Z87 + / P c SEI Z94.3			
SR4110S	P Z87 + U6	P Z87 + / P c SEI Z94.3			

Product markings may vary // Updated as of 07.24