
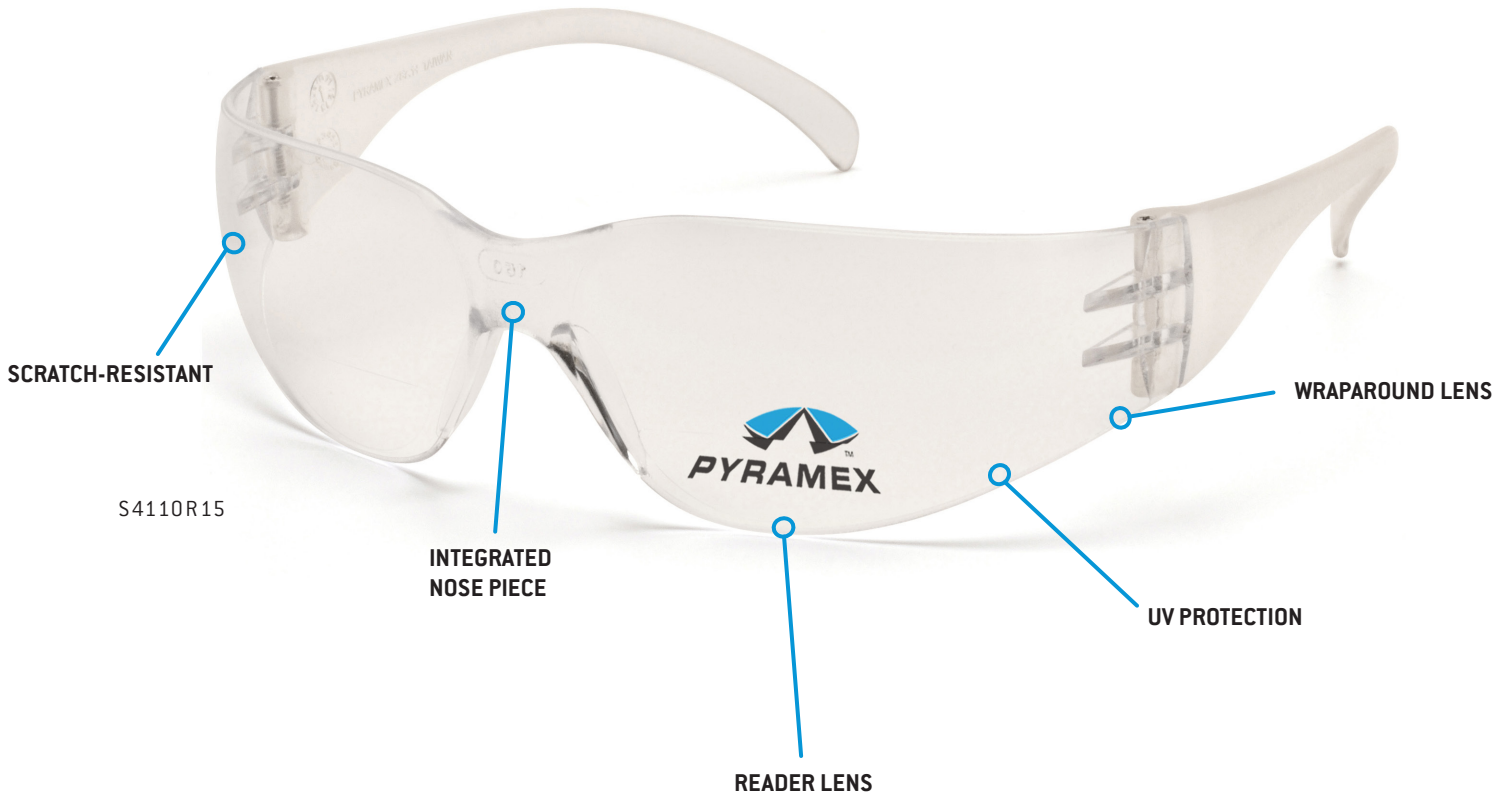


# INTRUDER<sup>®</sup> READER

## UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience ultimate protection and comfort with Intruder<sup>®</sup> reader safety glasses. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment, coupled with readers to aid those requiring extra magnification.



## FEATURES

**Unparalleled Comfort:** Experience the ultimate in comfort with these frameless, lightweight safety glasses, ideal for long hours on the job

**Enhanced Field of Vision:** Panoramic polycarbonate, wraparound lens offers an extended field of vision crucial for safety in busy work environments, while also providing UV protection for comprehensive eye safety

**Confident Fit:** Integrated nose piece securely positions the glasses, ensuring they stay in place, providing reliable eye protection

**Clear Safe View:** Combines vision correction and eye protection for clear and safe close-up work

**Built Tough:** Meets ANSI/ISEA Z87.1-2020 for eye and face protection devices

# INTRUDER<sup>®</sup> READER

## UNRESTRICTED VISION, UNRIVALED PROTECTION



Experience ultimate protection and comfort with Intruder<sup>®</sup> reader safety glasses. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment, coupled with readers to aid those requiring extra magnification.

### VARIATIONS

● S4110R15	Clear	+1.5 Mag
● S4110R20	Clear	+2.0 Mag
● S4110R25	Clear	+2.5 Mag



### MATERIALS

Lens	Temples	Hinge	Screw
Polycarbonate	Polycarbonate	Polycarbonate	Stainless Steel

### MARKINGS

Part No.	Lens Marking	Frame Marking	Lens Marking Symbols	Temple Marking Symbols	Measurements
S4110R15	+150 P Z87 +	P Z87 +	P: Manufacturer's mark	P: Manufacturer's mark	Weight: 23.1 gm
S4110R20	+200 P Z87 +	P Z87 +	Z87: ANSI/ISEA Z87.1-2020 standard for eye and face protection devices	Z87: ANSI/ISEA Z87.1-2020 standard for eye and face protection devices	PD: 64 mm
S4110R25	+250 P Z87 +	P Z87 +	+: High impact	+: High impact	Bridge: 17.27 mm
			<b>UV Filter Transmittance</b>		Lens base: 10 curve
			U6: .01% max effective far UV • .1% max near UV		Lens size diagonal: 77.08 mm
			<b>Visible Light Filters</b>		Lens size vertical: 43.38 mm
			L1.7: 55% Max. Visible Light		Lens thickness: 2.5 mm
			L3: 18% max visible light		Overall length (lens - tip): 156 mm
					Overall width (hinge - hinge): 135.5 mm
					Closest point between lens: 16.67 mm

Product markings may vary // Updated as of 10.24