
# MINI INTRUDER®

## UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience the Mini Intruder with all the great features of Intruder® safety glasses in a design better suited for smaller facial sizes. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment.



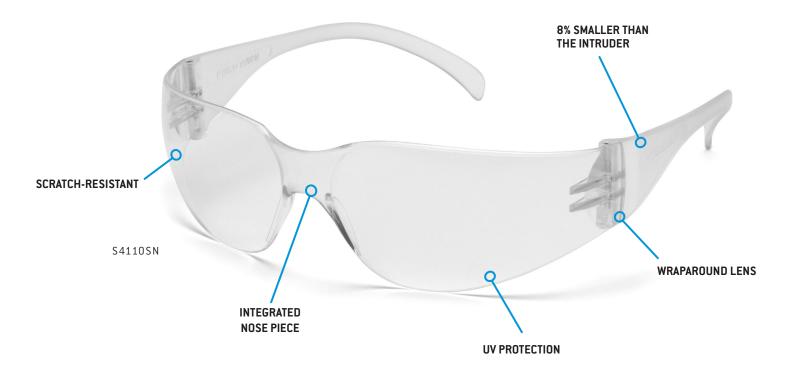

#### FEATURES

**Unparalleled Comfort:** Experience the ultimate in comfort with these frameless, lightweight safety glasses, ideal for long hours on the job

**Enhanced Field of Vision:** Panoramic polycarbonate, wraparound lens offers an extended field of vision crucial for safety in busy work environments, while also providing UV protection for comprehensive eye safety

**Confident Fit:** Integrated nose piece securely positions the glasses, ensuring they stay in place, providing reliable eye protection

Built Tough: Meets ANSI/ISEA Z87.1-2020 for eye and face protection devices





PYRAMEX<sup>®</sup> **¾ ₩ -- ~ 0 ⊕** ☆ ▲ P 800.736.8673 // F 901.861.4967 // W PYRAMEX.COM

# MINI INTRUDER®

## UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience the Mini Intruder with all the great features of Intruder® safety glasses in a design better suited for smaller facial sizes. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment.



## VARIATIONS



Clear



S4110SN



## Gray Lens & Temple

S4120SN Gray

### MATERIALS

Lens	Temples	Hinge	Screw
Polycarbonate	Polycarbonate	Polycarbonate	Stainless Steel

#### MARKINGS

Part No.	Lens Marking	Frame Marking	Lens Marking Symbols	Temple Marking Symbols	Measurements
S4110SN	P Z87 + H U6	P Z87 +	P: Manufacturer's mark	P: Manufacturer's mark	Weight: 17.9 gm
S4120SN P Z87 + H U6 L3	P Z87 +	Z87: ANSI/ISEA Z87.1-2020 standard	Z87: ANSI/ISEA Z87.1-2020 standard for eye and face protection devices +: High impact	PD: 62 mm	
		for eye and face protection devices		Bridge: 14.17 mm	
		+: High impact		Lens base: 11 curve	
		H: Small head size		Lens size diagonal: 69.43 mm	
		UV Filter Transmittance		Lens size vertical: 39.92 mm	
		U6: .01% max effective far UV • .1% max near UV			
				Lens thickness: 2.1 mm	
		Visible Light Filters		Overall length (lens - tip): 144 mm	
		L1.7: 55% Max. Visible Light		Overall width (hinge - hinge): 121.8 mm	
		L3: 18% max visible light			
					Closest point between lens: 14.38 mm

Product markings may vary // Updated as of 10.24

# PYRAMEX° 🔌 🖬 🕶 🗢 0 🖓 😘 🛤

P 800.736.8673 // F 901.861.4967 // W PYRAMEX.COM